

Conduit Specification

Electrical Light Duty Orange Solid Wall Conduit

Product Data

Tri Code	Length Overall (mm)		Outside Diameter With Ovality (mm)		Wall Thickness (mm)		Socket Length(mm)	Socket Mouth I.D. with Ovality (mm)		Socket Root I.D with Ovality (mm)		Weight (kg)
	Min	Max	Min	Max	Min	Max		Min	Max	Min	Max	
CONLDSW804.5	4500	4550	88.7	89.1	2.4	2.8	73	89.2	89.5	88.3	88.6	4.9
CONLDSW100	6099	6149	114.1	114.5	3.0	3.5	99	114.8	115.1	113.5	113.8	10.8
CONLDSW1004.5	4500	4550	114.1	114.5	3.0	3.5	99	114.8	115.1	113.5	113.8	8.1
CONLDSW125	6115	6165	140.0	140.4	3.7	4.3	115	140.8	141.1	139.4	139.7	16.3
CONLDSW1254.5	4500	4550	140.0	140.4	3.7	4.3	115	140.8	141.1	139.4	139.7	12.2
CONLDSW150	6124	6174	160.0	160.5	4.2	4.8	124	160.8	161.1	159.4	159.7	20.5
CONLDSW200	4124	4174	225.0	225.6	5.4	6.1	147	225.9	226.3	224.3	224.7	25

All weights are based on solid wall conduit only

1300 874 874
www.triunderground.com

sales@triunderground.com


QLD 46-56 Potassium Street, Narangba QLD, 4505

NSW Warehouse 3/2 Percival Road, Smithfield NSW 2164

VIC Unit 2/12 Holcourt Road, Laverton North, Victoria 3026

Conduit Specification

Electrical Light Duty Orange Solid Wall Conduit

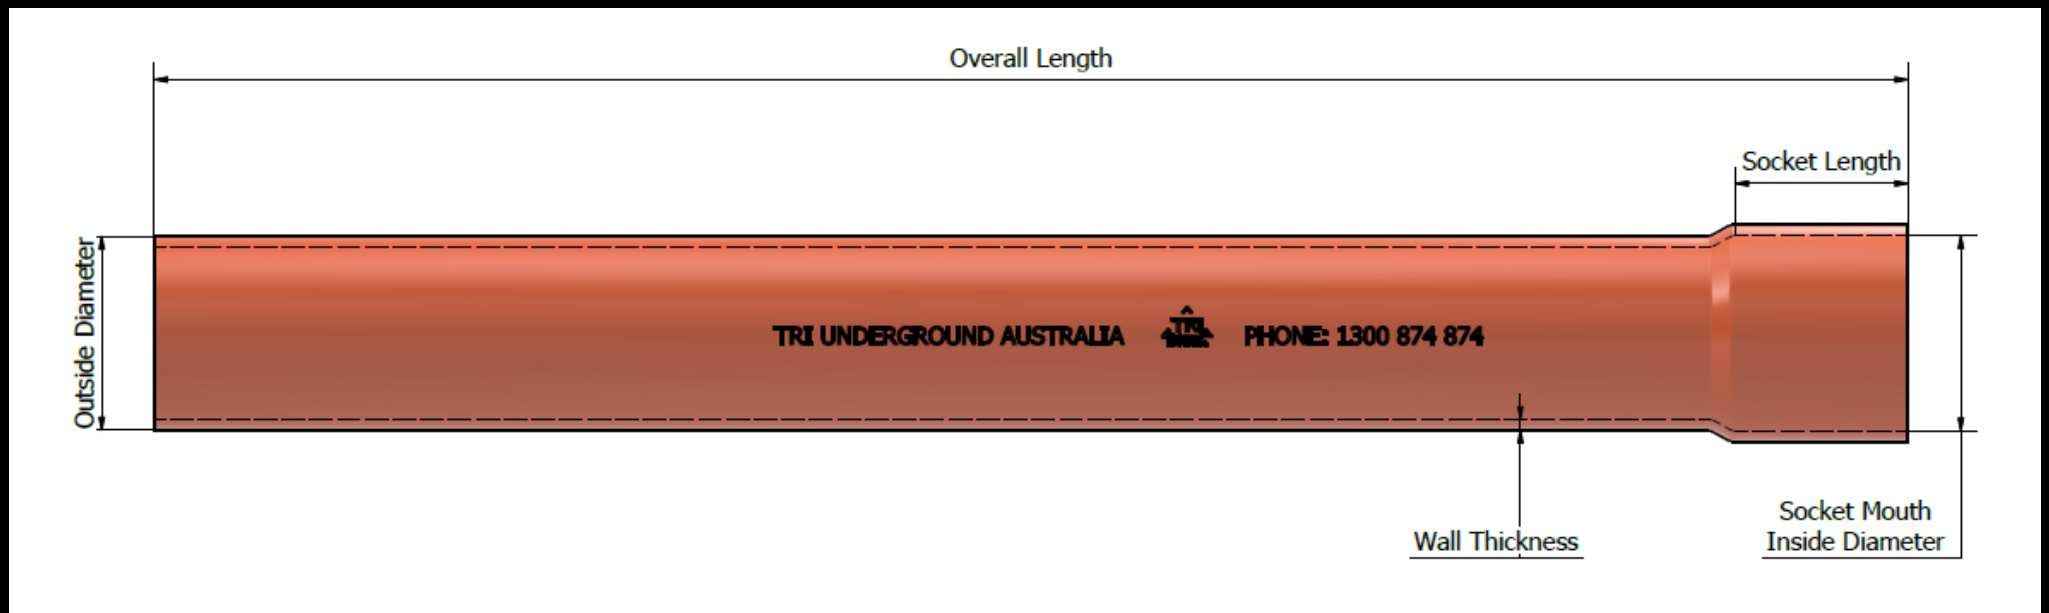

1300 874 874
www.triunderground.com

sales@triunderground.com

QLD 46-56 Potassium Street, Narangba QLD, 4505
NSW Warehouse 3/2 Percival Road, Smithfield NSW 2164
VIC Unit 2/12 Holcourt Road, Laverton North, Victoria 3026