

Conduit Specification

Communications Medium Duty White Solid Wall Conduit

Product Data

Tri Code	Length Overall (mm)		Outside Diameter With Ovality (mm)		Wall Thickness (mm)		Socket Length(mm)	Socket Mouth I.D. with Ovality (mm)		Socket Root I.D with Ovality (mm)		Weight (kg)
CONCOM20*	4016	4046	19.6	20.1	1.8	2.1	16	19.9	20.6	19.2	19.9	0.6
CONCOM25*	4020	4050	24.6	25.1	1.8	2.1	20	24.9	25.6	24.2	24.9	0.8
CONCOM32*	4025	4055	31.6	32.1	2.1	2.4	25	31.9	32.6	31.2	31.9	1.2
CONCOMSW50	4040	4060	49.6	50.1	2.8	3.1	40	49.9	50.6	49.2	49.9	2.8
CONCOMHDSW804 ^Δ	4073	4123	88.4	89.3	4.6	5.3	73	89.0	89.7	88.1	88.8	7.9
CONCOMSW100	6099	6149	113.3	114.55	4.3	4.68	99	114.8	115.05	112.75	113.0	15.5
CONCOMHDSW150 ^Δ	4124	4174	159.5	161.1	8.3	9.3	124	160.5	161.4	159.1	160.0	30

^Δ These products are only available in Heavy Duty

*Tri Underground do not currently manufacture these sizes and dimensions is based on information from the manufacturer.

1300 874 874
www.triunderground.com

sales@triunderground.com


QLD 46-56 Potassium Street, Narangba QLD, 4505

NSW Warehouse 3/2 Percival Road, Smithfield NSW 2164

VIC Unit 2/12 Holcourt Road, Laverton North, Victoria 3026

Conduit Specification

Communications Medium Duty White Solid Wall Conduit

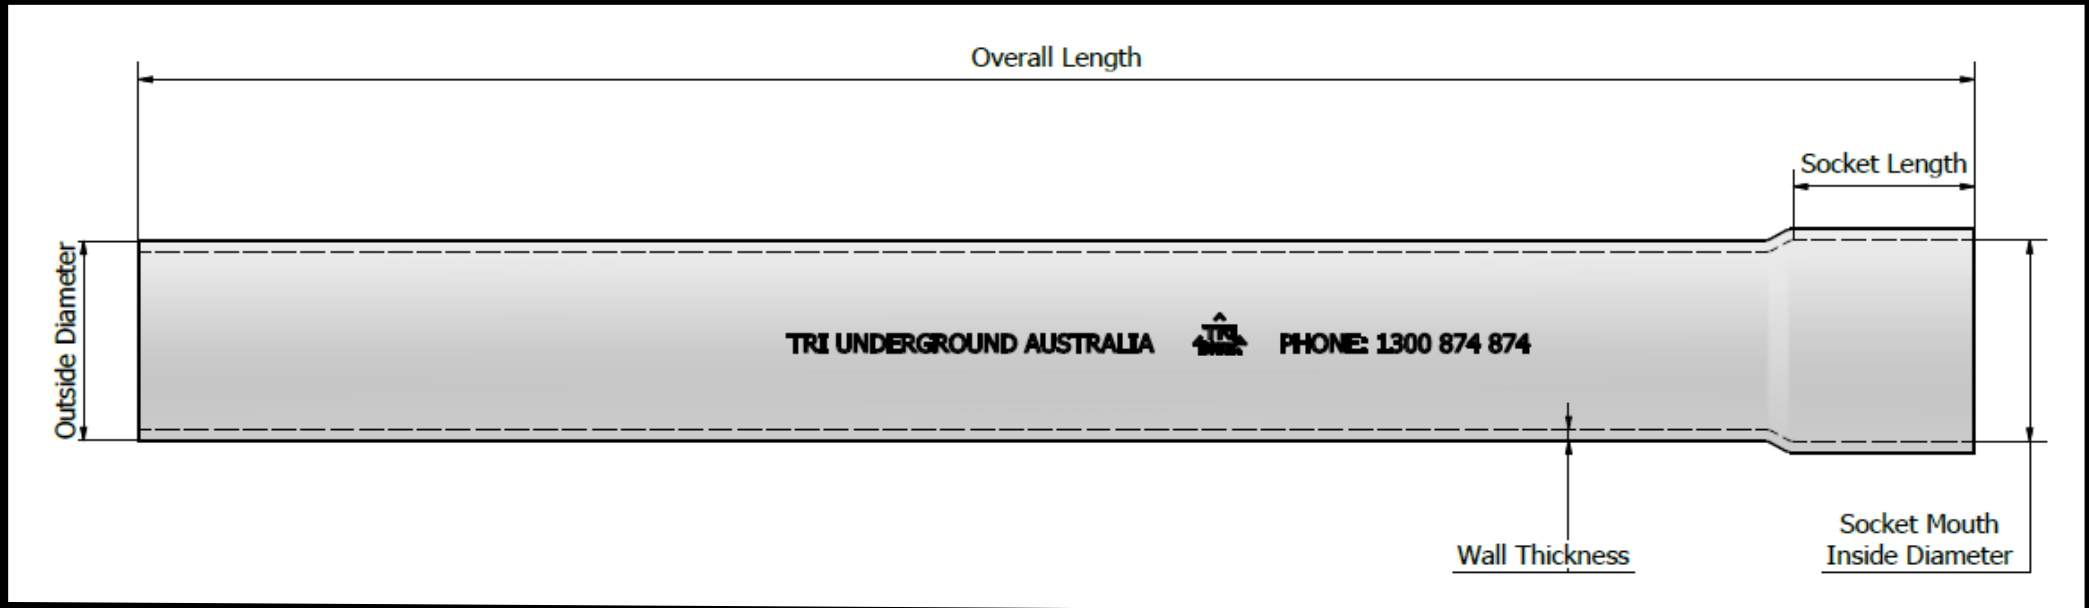

1300 874 874
www.triunderground.com

sales@triunderground.com

QLD 46-56 Potassium Street, Narangba QLD, 4505
NSW Warehouse 3/2 Percival Road, Smithfield NSW 2164
VIC Unit 2/12 Holcourt Road, Laverton North, Victoria 3026