



NOTES:


1. MANUFACTURED IN ACCORDANCE WITH ENERGEX DRAWING 7023-A2
2. CONCRETE SHALL BE 40 MPA
3. ALL CONCRETE MATERIALS AND WORKMANSHIP SHALL COMPLY WITH AS3600
4. FABRICATION, LIFTING, HANDLING AND INSTALLATION OF PRECAST CONCRETE COMPONENTS AND OR UNITS SHALL BE IN STRICT ACCORDANCE WITH ALL THE CURRENT REQUIREMENTS AND REGULATIONS SET OUT IN THE WORKPLACE HEALTH AND SAFETY ACT.
5. ENERGEX STOCK CODE 19960

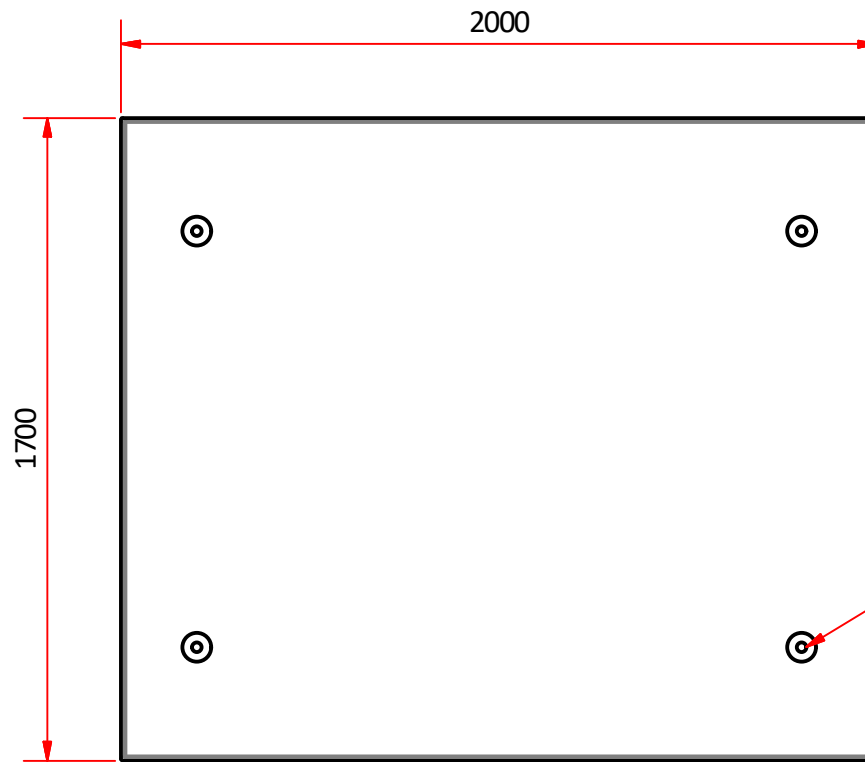

TOP VIEW (1:20)

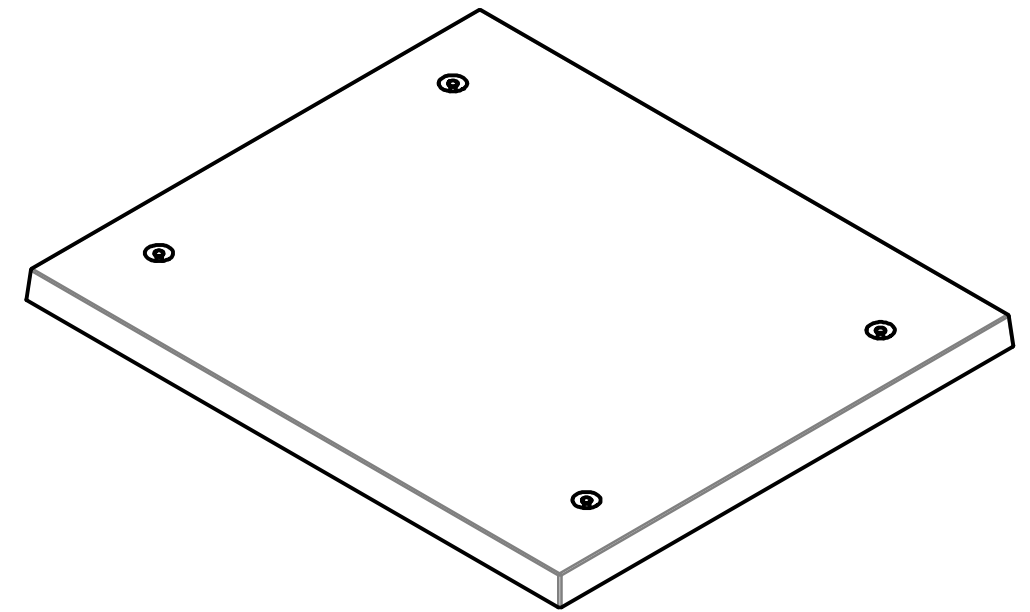

3D VIEW (1:20)

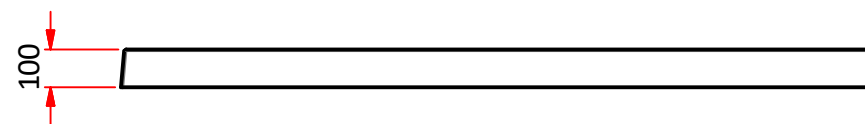

FRONT VIEW (1:20)

x4 1.3t LIFTING ANCHORS

General Notes;

1. All dimensions are in mm
2. The tolerance on all dimensions 300 mm or less is ± 1.5 mm and dimensions over 300 mm is ± 3 mm unless stated otherwise

Copyright: TRI Underground Australia Pty Ltd

This instruction and all the information herein is the property of TRI Underground PTY LTD. It must not be copied, made public or used directly or indirectly, including manufacture of the product shown herein, without written approval. This instruction is loaned subject to these conditions and subject to return on demand.

Commercial in confidence

	Material CONCRETE	Designed by IMD	Checked by HL	Approved by HA	Date 23/03/2022	Date 20/01/2022
	Weight APPROX. 950 kg	TRI Underground Australia			Title UNCULVERT BASE SLAB	
	Finish OFF MOULD				Dwg No. 13943	Edition A