

Conduit Specification

Communications Heavy Duty White Solid Wall Conduit

Product Data

Tri Code	Length Overall (mm)		Outside Diameter With Ovality (mm)		Wall Thickness (mm)		Socket Length(mm)	Socket Mouth I.D. with Ovality (mm)		Socket Root I.D with Ovality (mm)		Weight (kg)
	Min	Max	Min	Max	Min	Max		Min	Max	Min	Max	
CONCOMHDSW50	4040	4060	49.6	50.1	3.4	3.9	40	49.9	50.6	49.2	49.9	3.3
CONCOMHDSW804	4073	4123	88.4	89.3	4.6	5.3	73	89.0	89.7	88.1	88.8	7.9
CONCOMHDSW1004	4099	4149	113.7	114.9	5.9	6.7	99	114.6	115.3	113.3	114	13.4
CONCOMHDSW150	4124	4174	159.5	161.1	8.3	9.3	124	160.5	161.4	159.1	160	30

All weights are based on solid wall conduit only


1300 874 874
www.triunderground.com

sales@triunderground.com

QLD 46-56 Potassium Street, Narangba QLD, 4505
NSW Warehouse 3/2 Percival Road, Smithfield NSW 2164
VIC Unit 2/12 Holcourt Road, Laverton North, Victoria 3026

Conduit Specification

Communications Heavy Duty White Solid Wall Conduit

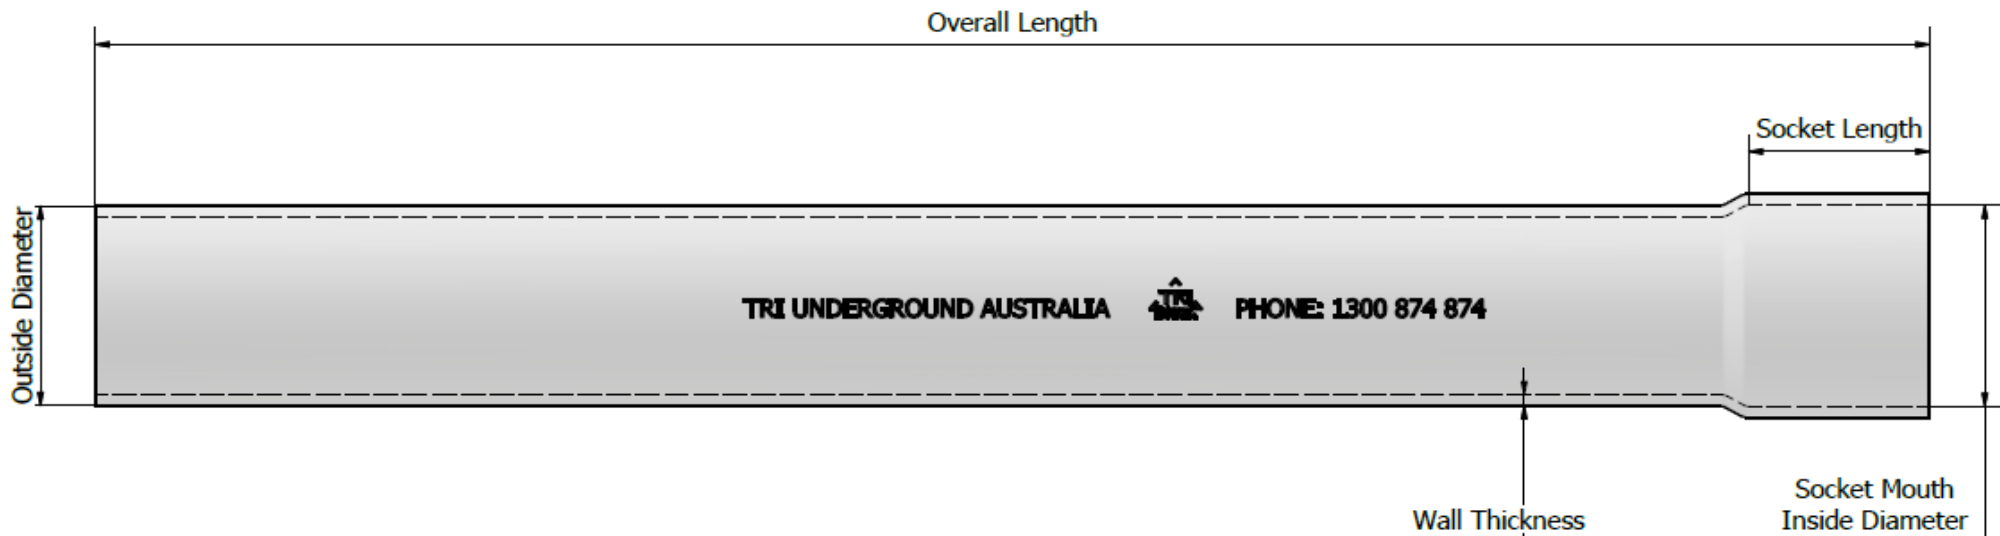

1300 874 874
www.triunderground.com

sales@triunderground.com

QLD 46-56 Potassium Street, Narangba QLD, 4505
NSW Warehouse 3/2 Percival Road, Smithfield NSW 2164
VIC Unit 2/12 Holcourt Road, Laverton North, Victoria 3026