

Conduit Specification

Electrical Heavy Duty Orange Solid Wall Conduit

Product Data

Tri Code	Length Overall (mm)		Outside Diameter With Ovality (mm)		Wall Thickness (mm)		Socket Length(mm)	Socket Mouth I.D. with Ovality (mm)		Socket Root I.D with Ovality (mm)		Weight (kg)
	Min	Max	Min	Max	Min	Max		Min	Max	Min	Max	
CONHD20*	4016	4036	19.7	20.1	2.3	2.6	16	19.9	20.6	19.2	19.9	0.8
CONHD25*	4020	4050	24.6	25.1	2.5	2.8	20	24.9	25.6	24.2	24.9	1.1
CONHD32*	4025	4045	31.6	32.1	2.7	3.0	25	31.9	32.6	31.2	31.9	1.5
CONHD40*	4032	4062	39.6	40.1	3.1	3.4	32	39.9	40.6	39.2	39.9	2.3
CONHDSW50	4040	4060	49.6	50.1	3.4	3.9	40	49.9	50.6	49.2	49.9	3.3
CONHDSW63	4050	4070	62.5	63.1	3.9	4.5	50	62.9	63.6	62.2	62.9	4.9
CONHDSW80	4073	4123	88.4	89.3	4.6	5.3	73	89.0	89.7	88.1	88.8	7.9
CONHDSW100	4099	4149	113.7	114.9	5.9	6.7	99	114.6	115.3	113.3	114.0	13.4
CONHDSW125	4115	4165	139.5	140.9	7.2	8.1	115	139.5	140.9	139.1	139.9	20.5
CONHDSW150	4124	4174	159.5	161.1	8.3	9.3	124	160.5	161.4	159.1	160.0	30
CONHDSW200	4147	4197	224.2	226.4	10.5	11.7	147	225.9	226.3	224.3	224.7	46.7

*Tri Underground do not current manufacture these sizes and dimensions is based on information from the manufacturer.

All weights are based on solid wall conduit only


1300 874 874
www.triunderground.com

sales@triunderground.com

QLD 46-56 Potassium Street, Narangba QLD, 4505
NSW Warehouse 3/2 Percival Road, Smithfield NSW 2164
VIC Unit 2/12 Holcourt Road, Laverton North, Victoria 3026

Conduit Specification

Electrical Heavy Duty Orange Solid Wall Conduit

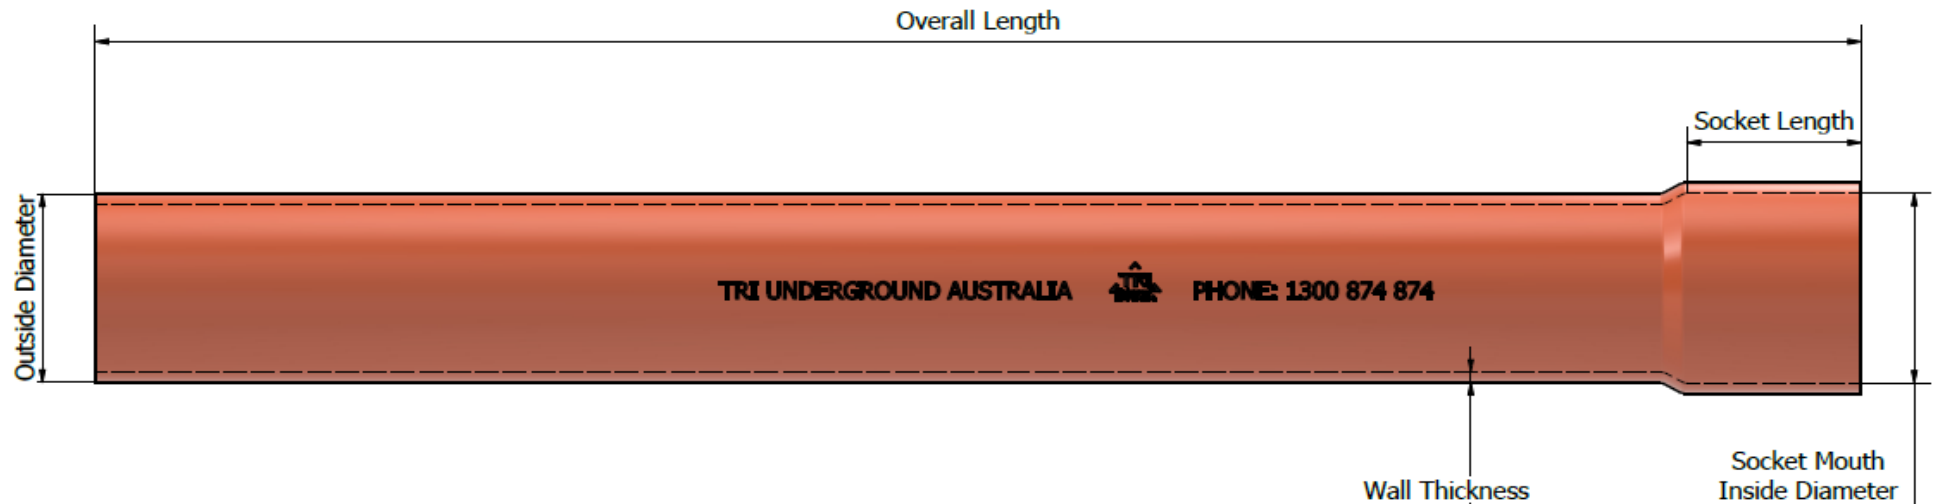

1300 874 874
www.triunderground.com

sales@triunderground.com

QLD 46-56 Potassium Street, Narangba QLD, 4505
NSW Warehouse 3/2 Percival Road, Smithfield NSW 2164
VIC Unit 2/12 Holcourt Road, Laverton North, Victoria 3026