

Conduit Specification

NBN White Solid Wall Conduit

Product Data

Tri Code	Length Overall (mm)		Outside Diameter With Ovality (mm)		Wall Thickness (mm)		Socket Length(mm)	Socket Mouth I.D. with Ovality (mm)		Socket Root I.D with Ovality (mm)		Weight (kg)
	Min	Max	Min	Max	Min	Max		Min	Max	Min	Max	
CONNBN204.5*	4500	4520	26.6	26.9	1.4	1.7	35	27.0	27.3	26.2	26.5	0.9
CONNBNCOMSW50	4500	4530	60.2	60.5	3.1	3.6	64	60.1	60.4	59.3	59.6	4.2
CONCOMSW100	6099	6149	113.3	114.55	4.3	4.68	99	114.8	115.05	112.75	113.0	15.5

*Tri Underground do not currently manufacture these sizes and dimensions is based on information from the manufacturer.

All weights are based on solid wall conduit only


1300 874 874
www.triunderground.com

sales@triunderground.com

QLD 46-56 Potassium Street, Narangba QLD, 4505
NSW Warehouse 3/2 Percival Road, Smithfield NSW 2164
VIC Unit 2/12 Holcourt Road, Laverton North, Victoria 3026

Conduit Specification

NBN White Solid Wall Conduit

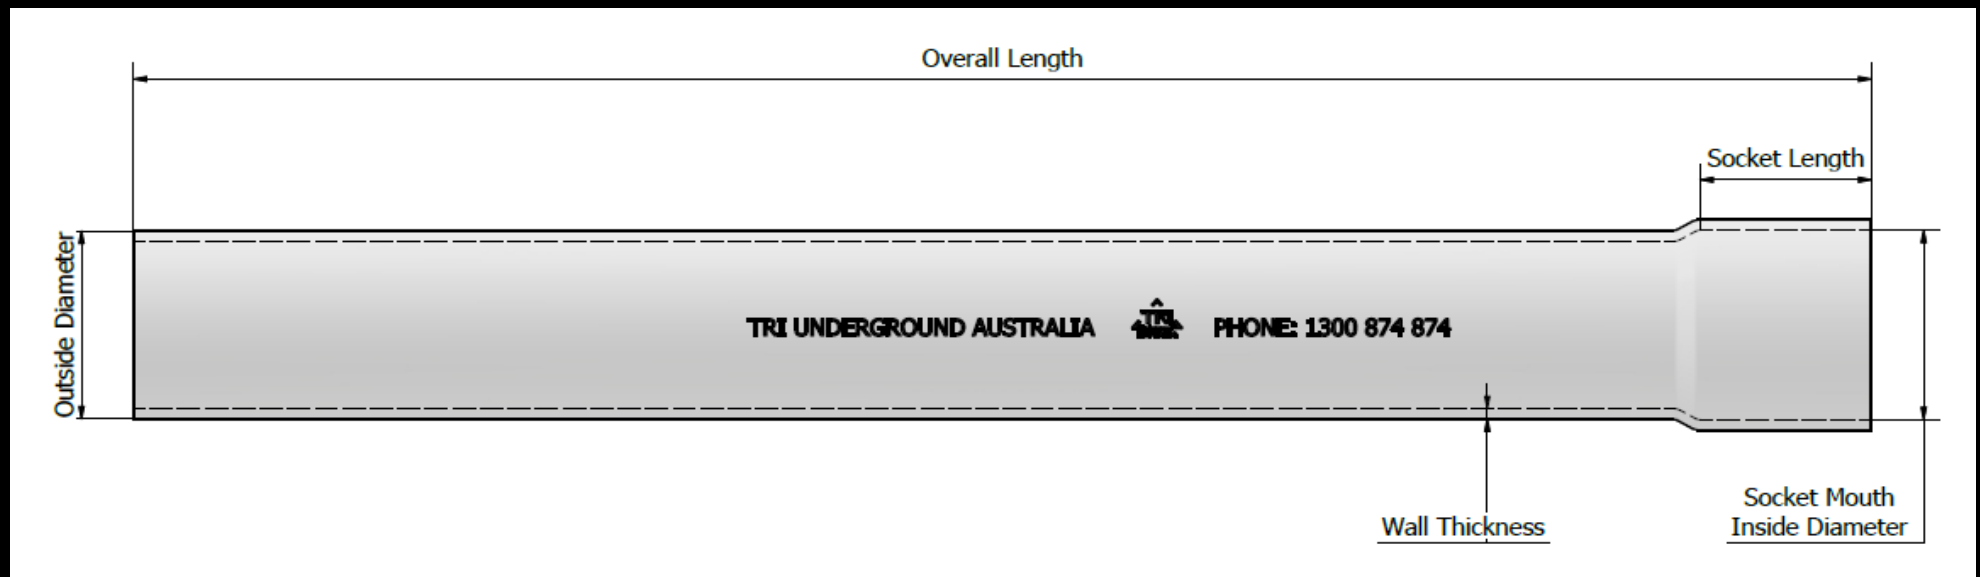

1300 874 874
www.triunderground.com

sales@triunderground.com

QLD 46-56 Potassium Street, Narangba QLD, 4505
NSW Warehouse 3/2 Percival Road, Smithfield NSW 2164
VIC Unit 2/12 Holcourt Road, Laverton North, Victoria 3026